
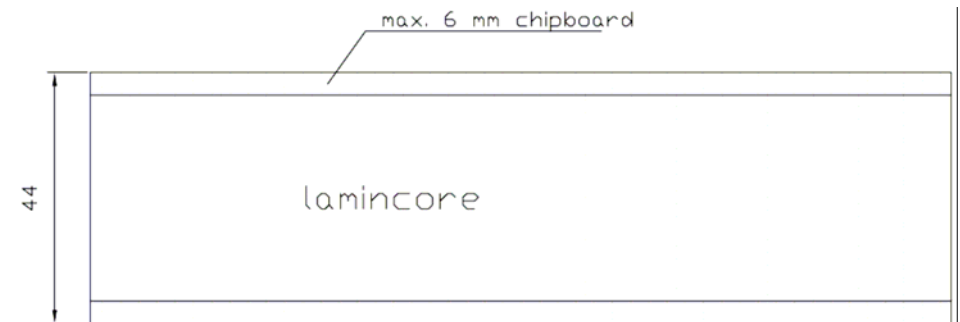
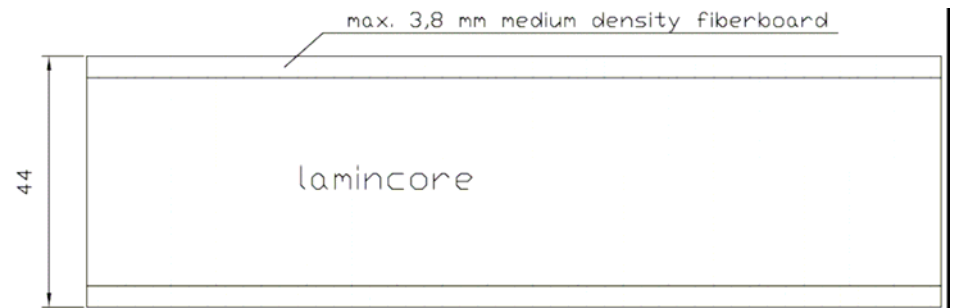


Product

Crossview

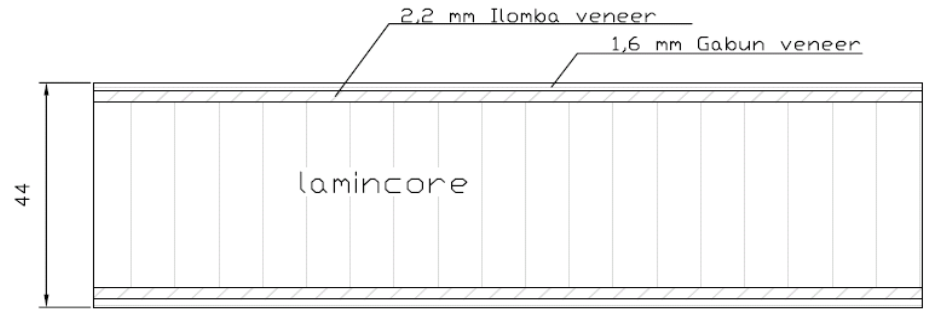

Construction data:

- Spruce Lamincore
- MDF-, chip- faces (internal use)
- Veneer faces (external use)

USPs:

- Solid timber core (450kg/m³)
- PEFC / FSC certified
- Larger sheet sizes available (max. 5200 x 2100mm)

Further characteristics

Acoustic insulation:

- Chip-faced 44mm: dB 35 (Norseal)
- Chip-faced 54mm: dB 34 – 36 (Norseal / Lorient Polyproducts)